

Decorative Concrete

Midwest Rake Company tools are used, featured, and promoted within the training and certification seminars of nearly all of the major manufacturers of decorative concrete systems.

We are dedicated to supporting the fast-growing decorative concrete industry with quality application and finishing tools. We value those frequent requests we receive to create "new and improved" tools for decorative concrete contractors; for above all else, Midwest Rake is dedicated to these "concrete artisans" who use our tools to make a living.

Our Most Popular Sizes



1/8" - 57082



1/4" - 57084



3/8" - 57086


CAM® Gauge Rakes

A patented "goof-proof" tool which applies a range of materials at a precise, specified, and uniform depth.

For use in applying decorative concrete "toppings," self leveling/high performance floor coating materials, and underlayments in the floor-covering markets. CAM® depth settings range from 1/32" to 1-1/2". A must have tool for the decorative concrete and floor coating contractor.

MADE IN THE USA

We use a "radial" edge CAM® design which maintains uniform coating thickness, even at varying handle angles and lengths.

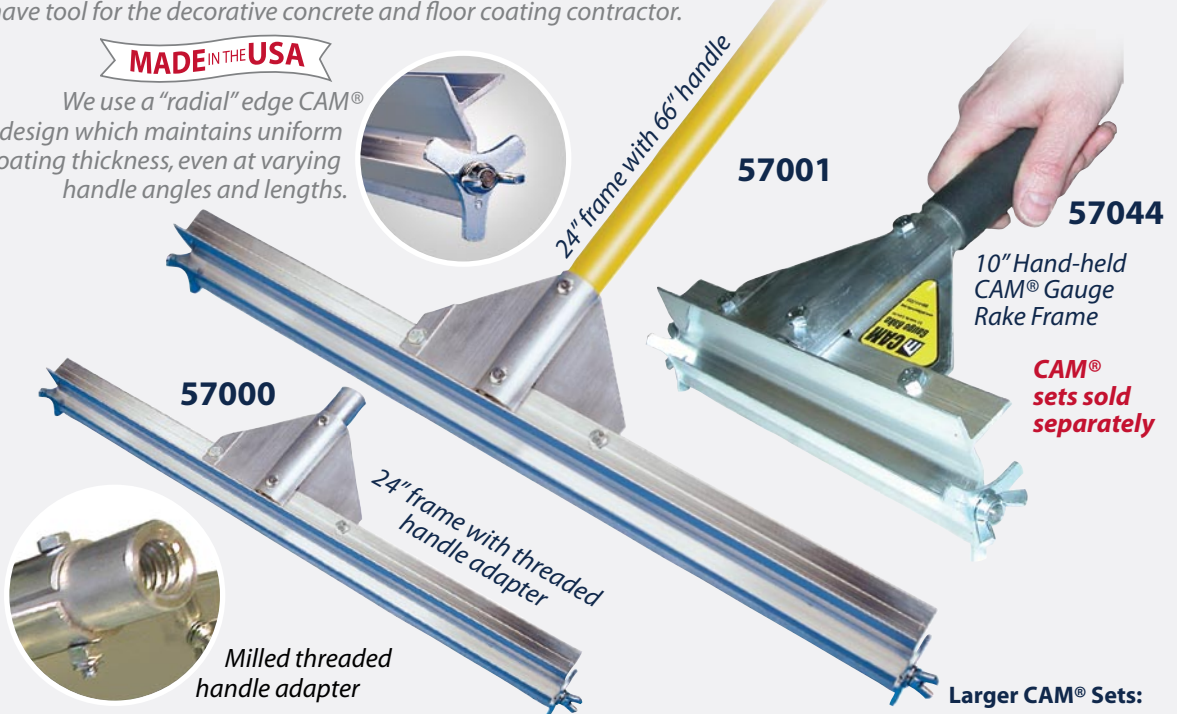

10" Hand-held CAM® Gauge Rake Frame

CAM® sets sold separately



1/32"	1/24"	1/16"	1/8"	3/16"	1/4"	5/16"	3/8"	1/2"
57078	57079	57081	57082	57083	57084	57085	57086	57088

Larger CAM® Sets:

5/8" CAM® Set
57090

1" CAM® Set
57096

1-1/2" CAM® Set
57104

Description	Item No. 12"	Item No. 24"	Item No. 36"	Item No. 48"
CAM® Gauge Rake with Threaded Handle Adapter (Frame Only)	57030	57000	57010	57020
CAM® Gauge Rake with 66" Powder-Coated Aluminum Handle (Frame Only)	57031	57001	57011	57021
CAM® Gauge Rake with 82" Powder-Coated Aluminum Handle (Frame Only)	57032	57002	57012	57022

CAM® Gauge Rake Frames and CAM® Sets are sold separately

EXCLUSIVE FEATURES:

- Head widths range from 10" (hand held) to 48". The 24" and 36" widths are the most popular. CAM® sets come in depth settings ranging from 1/32" to 1-1/2" with the 1/8", 1/4", and 3/8" CAM® sets being the most popular.
- Each CAM® has multiple contact points of the same depth... when worn down, loosen the wing nut and rotate the CAM® for a fresh contact point of the same depth setting.
- The CAM® Gauge Rake is available with a milled threaded handle adapter or a 66" powder-coated aluminum handle. The 10" CAM® Rake is used for small areas and counter tops and has its own fixed handle with grip.